



CREATING NEW PRODUCTS CONTINUOUSLY  
SATISFYING YOUR DESIRE ALWAYS




ISO-9001


AUTOMATIC SEALERS(TABLETOP)



SHRINK WRAP SYSTEMS

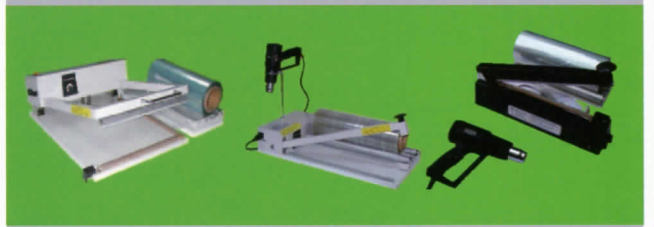

CONTINUOUS BAND SEALER

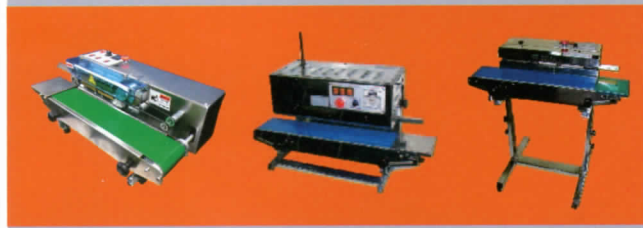

FOOD PACKAGING MACHINE




HAND SEALER




HAND HELD SEALER



FOOT SEALER

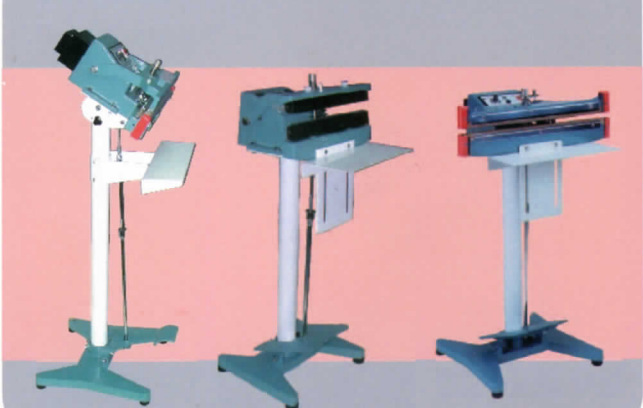

AUTO SEALER (VERTICAL TYPE)

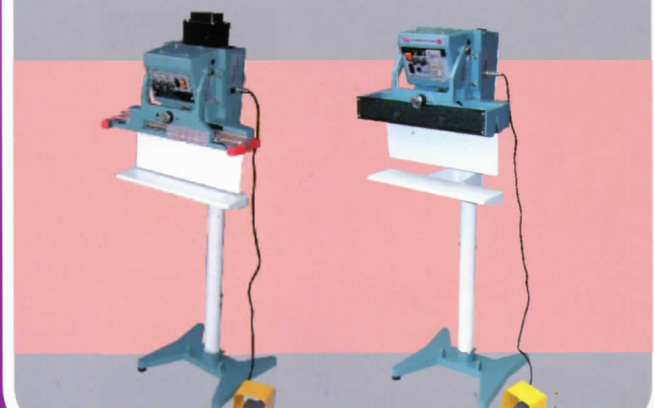

# IMPULSE HAND SEALERS



**300HI IMPULSE SEALER**  
WITH BEEPER IS AVAILABLE  
SEALING WIDTH 2.5mm/5mm IS AVAILABLE



**305HIM HAND IMPULSE SEALER**  
WITH HOLDING MAGNET  
SEALING WIDTH 2.5mm/5mm IS AVAILABLE



**800HI/N EXTRA LARGE HAND SEALER**  
LOWER HEATING AVAILABLE

Model	100HI	200HI	300HI	400HI	500HI	300HIM	400HIM	450HI/N	600HI/N	800HI/N	1000HI/N
Max. Seal Length	100mm	200mm	300mm	400mm	500mm	300mm	400mm	450mm	600mm	800mm	1000mm
Max. Seal Thickness	2 X 0.15mm	2 X 0.15mm	2 X 0.15mm	2 X 0.15mm	2 X 0.15mm	2x 0.15mm	2x 0.15mm	2x 0.15mm	2x 0.15mm	2x 0.15mm	2x 0.15mm
Seal Width	2mm	2mm	2.5mm	2.5mm	2.5mm	2.5mm	2.5mm	2.5mm	2.5mm	2.5mm	2.5mm
Watts	200 W	350 W	500 W	750W	900W	500 W	750W	600 W	800 W	800 W	1000W
Weight	2.7KG	3.6KG	4.8KG	6KG	7.7KG	6KG	7.3KG	6KG	7.8KG	9KG	11KG

## IMPULSE SEALERS WITH CUTTER

**300HC IMPULSE HAND SEALER**  
WITH CUTTER  
WITH BEEPER IS AVAILABLE  
SEALING WIDTH 2.5mm/5mm IS AVAILABLE



**500HC IMPULSE HAND SEALER**  
WITH CUTTER / STEEL COVER  
SEALING WIDTH 2.5mm/5mm IS AVAILABLE

**305HCG SEMI AUTO SEALER**  
MAGNETIC HOLD WITH CUTTER  
SEALING WIDTH 2.5mm/5mm IS AVAILABLE



Model	200HC	300HC	400HC	500HC
Max. Seal Length	200mm	300mm	400mm	500mm
Max. Seal Thickness	2x 0.15mm	2x 0.15mm	2x 0.15mm	2x 0.15mm
Seal Width	2mm	2.5mm	2.5mm	2.5mm
Watts	350W	500 W	750 W	900W
Weight	4.5KG	5.4KG	7.3KG	8 KG

Model	300HCG	400HCG	500HCG
Max. Seal Length	300mm	400mm	500mm
Max. Seal Thickness	2x 0.15mm	2x 0.15mm	2x 0.15mm
Seal Width	2.5mm	2.5mm	2.5mm
Watts	500 W	750 W	930W
Weight	6KG	7.3KG	8KG

## IMPULSE SEALERS WITH CUTTER (FOR FOOD)

**500HCS IMPULSE HAND SEALER**  
WITH CUTTER/STAINLESS TYPE  
SEALING WIDTH 2.5mm/5mm IS AVAILABLE



**2010HC IMPULSE SEALER (MEDICAL)**  
10mm SEAL WITH BEEPER & CUTTER  
\*WORK TABLE & RACK SOLD SEPARATELY.



Model	300HCS	400HCS	500HCS
Max. Seal Length	300mm	400mm	500mm
Max. Seal Thickness	2x 0.15mm	2x 0.15mm	2x 0.15mm
Seal Width	2.5mm	2.5mm	2.5mm
Watts	500W	750 W	900W
Weight	6.5KG	7.3KG	8KG

Model	2010HC	3010HCS
Max. Seal Length	200mm	300mm
Max. Seal Thickness	2 x 0.25mm	2 x 0.25mm
Seal Width	10mm	10mm
Watts	1000 W	1200W
Weight	6.4KG	8KG




# VACUUM SEALERS

**455VAV/VGV VERTICAL TYPE VACUUM AND GAS FLASH SEALER**  
REQUIRES AIR COMPRESSOR  
AVAILABLE IN 5mm AND 10mm SEALING WIDTHS




CE

**455VG/VGD VACUUM AND GAS FLASH SEALER**  
REQUIRES AIR COMPRESSOR  
AVAILABLE IN 5mm AND 10mm SEALING WIDTHS

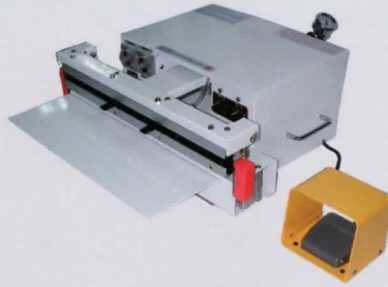

CE

**605VA/VAD BI-ACTIVE VACUUM SEALER/GAS FLUSH**  
IT CAN SEAL UP TO 0.8mm GUSSETED OR REGULAR THERMOPLASTIC FILM. IDEAL FOR ALUM. FOIL COATED BAGS AND GUSSET BAGS.  
AVAILABLE IN 5mm AND 10mm SEALING WIDTHS

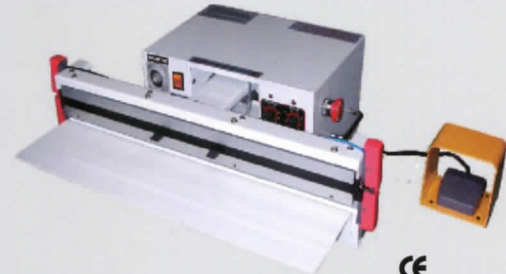


CE

Model	355VG/VA	455VG/VA	4510VG/VA	605VG/VA	6010VG/VA	355VGD/VAD	455VGD/VAD	4510VGD/VAD	605VGD/VAD	6010VGD/VAD	455VAV/VGV	605VAV/VGV
Sealing Length	350mm	450mm	450mm	600mm	600mm	350mm	450mm	450mm	600mm	600mm	450mm	600mm
Max. Seal Thickness	2x0.15mm	2 x 0. 15mm	2 x 0. 15mm	2 x 0. 15mm	2 x 0. 15mm	2 x 0.4mm	2 x 0. 4mm	2 x 0. 4mm	2 x 0. 4mm	2 x 0. 4mm	2 x 0.4mm	2 x 0.4mm
Seal Width	5mm	5mm	10mm	5mm	10mm	5mm	5mm	10mm	5mm	10mm	5mm	5mm
Watts	1000W	1100W	1500W	1400W	1900W	1700W	1800W	2400W	2200W	2800W	1800W	2200W
Weight	22KG	23KG	26KG	29KG	30KG	23KG	25KG	27KG	30KG	31KG	40KG	42KG


## VACUUM SEALER WITH TEMP. CONTROL

**3510VS/VSD VACUUM SEALERS WITH VACUUM PUMP & TEMP. CONTROL**  
COMES STANDARD WITH RETRACTABLE NOZZLES SYSTEM, EASIER PACKAGING AND GREAT SUSTAINED VACUUM FLOW  
AVAILABLE IN 5mm AND 10mm SEALING WIDTHS

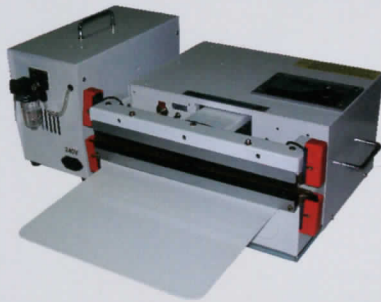


CE

**605VS/VSD BI-ACTIVE VACUUM SEALER/GAS FLUSH**  
IT CAN SEAL UP TO 0.8mm GUSSETED OR REGULAR THERMOPLASTIC FILM. IDEAL FOR ALUM. FOIL COATED BAGS AND GUSSET BAGS.  
AVAILABLE IN 5mm AND 10mm SEALING WIDTHS  
TEAT TEMP. 80-250°C

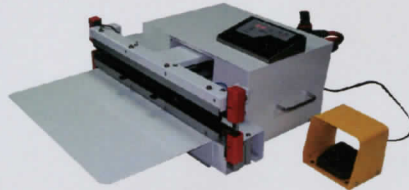

CE

**455GS/GSD VACUUM AND GAS FLASH SEALER**  
REQUIRES AIR COMPRESSOR  
AVAILABLE IN 5mm AND 10mm SEALING WIDTHS  
TEAT TEMP. 80-250°C

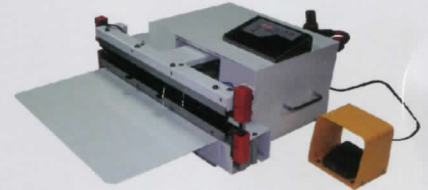

CE

Model	455GS/VS	4510GS/VS	605GS/VS	6010GS/VS	455GSD/VSD	4510GSD/VSD	605GSD/VSD	6010GSD/VSD	355VS/VSD	3510VS/VSD
Sealing Length	450mm	450mm	600mm	600mm	450mm	450mm	600mm	600mm	350mm	350mm
Max. Seal Thickness	2x0.15mm	2x0.15mm	2x0.15mm	2x0.15mm	2x0.4mm	2x0.4mm	2x0.4mm	2x0.4mm	2x0.15mm	2x0.15mm
Seal Width	5mm	10mm	5mm	10mm	5mm	10mm	5mm	5mm	5mm	10mm
Watts	1100W	1500W	1400W	1900W	1800W	2400W	2200W	2200W	1200W/1700W	1400W/2200W
Weight	23KG	26KG	29KG	30KG	25KG	27KG	30KG	30KG	40KG	42KG

## SHRINK WRAP SYSTEM

**400LP L-BAR IMPULSE**  
ECONOMICAL PORTABLE L-BAR SEALER  
ONE STEP FAST ACTING SHRINK WRAP SYSTEM.  
EXCELLENT FOR PP,PVC,PE.MATERIALS.



CE

**450SP I-BAR IMPULSE**  
PORTABLE I-BAR SEALER.



CE

**450IP I-BAR IMPULSE**  
ECONOMICAL PORTABLE I-BAR SEALER.  
NO WARM UP TIME NEEDED.  
OUTLET PLUG.



1200HG  
HEAT GUN



UL  
144M  
CE

Model	300LP	400LP	550LP	300SP	450SP	600SP	300IP	450IP	600IP	800IP	1000IP	1200HG
Max. Seal Length	340 x 340mm	400 x 600mm	600 x 600mm	330mm	450mm	600mm	330mm	450mm	600mm	800mm	1000W	Hi 260°C 1500°F
Max. Circum	680mm	780mm	980mm	550mm	800mm	1010mm	550mm	800mm	1110mm	1320mm	1520mm	Lo 150°C 1300°F
Watts	750W	1100W	1100W	250W	350W	450W	250W	350W	450W	750W	1000W	1200W
Weight	16KG	20KG	25KG	7KG	9KG	11KG	6KG	7.5KG	9KG	11KG	13KG	1KG

# IMPULSE FOOT SEALER



**300FI IMPULSE FOOT SEALER**  
INJECTION DIE CASTED BODY  
IMPRINTER IS AVAILABLE.  
5mm & 10mm SEALING WIDTH  
ARE AVAILABLE.



**455FD BI-ACTIVE IMPULSE SEALER**  
IDEAL FOR HEAVY-DUTY APPLICATION  
IMPRINTER IS AVAILABLE  
5mm & 10mm SEALING WIDTH  
ARE AVAILABLE.



**600FIU UPPER JAW SEALER**  
SEALING WIRE ON THE UPPER JAW MAKES THE SEALING PERFECT.  
IDEAL FOR LIQUIDS OR PRODUCTS WITH HIGH MOISTURE CONTENT.  
TO MAKE A CLEAN AND SECURE SEAL.  
5mm & 10mm SEALING WIDTH  
ARE AVAILABLE.



<b>Model</b>	300FI	450FI	600FI	800FI	305FD	455FD	605FD	805FD	300FIU	450FIU	600FIU	800FIU
<b>Sealing Length</b>	300mm	450mm	600mm	800mm	300mm	450mm	600mm	800mm	300mm	450mm	600mm	800mm
<b>Max. Seal Thickness</b>	2x0.15mm	2x0.15mm	2x0.15mm	2x0.15mm	2x0.4mm	2x0.4mm	2x0.4mm	2x0.4mm	2x0.15mm	2x0.15mm	2x0.15mm	2x0.15mm
<b>Seal Width</b>	2.5mm	2.5mm	2.5mm	2.5mm	5mm	5mm	5mm	5mm	2.5mm	2.5mm	2.5mm	2.5mm
<b>Watts</b>	450W	600W	800W	1000W	1500W	1800W	2200W	2600W	450W	600W	800W	800W
<b>Weight</b>	23KG	25KG	26.5KG	28KG	25KG	27KG	28KG	28KG	23KG	25KG	26.5KG	26.5KG

# CONSTANT FOOT SEALER



TEMP. SWITCH

**300CF CONSTANT HEAT SEALER**  
SIMPLE TYPE FOR SEALING ALUMINUM FOIL  
BAGS AND GUSSET BAGS.



TEMP. CONTROLLER

**300CFN CONSTANT HEAT SEALER**  
EXCELLENT FOR SEALING ALUMINUM FOIL  
BAGS AND GUSSET BAGS.  
CFN MODEL EQUIPPED WITH MASK  
PREVENTING SCALD.



**300CFS UPPER JAW CONSTANT HEAT SEALER**  
IDEAL FOR SEALING STERILIZATION MATERIALS AND PLASTIC  
BUBBLE BAGS. IMPRINTER IS AVAILABLE.



<b>Model</b>	200CF	300CF	400CF	200CFN	300CFN	400CFN	600CFN	300CFS	400CFS
<b>Sealing Length</b>	200mm	300mm	400mm	200mm	300mm	400mm	600mm	300mm	400mm
<b>Max. Seal Thickness</b>	2x0.25mm	2x0.25mm	2x0.25mm	2x0.25mm	2x0.25mm	2x0.25mm	2x0.25mm	2x0.25mm	2x0.25mm
<b>Seal Width</b>	10/15mm	10/15mm	10/15mm	10/15mm	10/15mm	10/15mm	10mm	5/10mm	5/10mm
<b>Watts</b>	250W	350W	420W	250W	350W	420W	520W	175W	210W
<b>Weight</b>	21KG	22KG	23KG	21KG	22KG	23KG	28KG	21KG	23KG

# VERTICAL FOOT SEALER

**450FIT ADJUSTABLE ANGLE SEALER**  
ADJUSTABLE ANGLE.  
HEAVY-DUTY (25KGS) WORKTABLE.  
LONG EXTENDED FOOT PEDAL.



**455FDV VERTICAL BI-ACTIVE IMPULSE SEALER**  
SUITABLE FOR HEAVY-DUTY BAGS.  
WET, DUSTY, POWDER OR LIQUID PACK.  
PREVENT STUFF FROM OVER FLOW.



**400CFV VERTICAL CONSTANT HEAT SEALER**  
EXCELLENT FOR ALUMINUM FOIL BAGS AND GUSSET BAGS.  
IDEAL FOR POWDER AND LIQUID PACKAGING.



<b>Model</b>	305FDV	455FDV	605FDV	805FDV
<b>Max. Seal Length</b>	300mm	450mm	600mm	800mm
<b>Max. Seal Thickness</b>	2 x 0.5mm	2 x 0.5mm	2 x 0.5mm	2 x 0.5mm
<b>Seal Width</b>	5mm	5mm	5mm	5mm
<b>Watts</b>	1600W	1900W	2300W	2900W
<b>Weight</b>	28KG	29KG	31KG	33KG

<b>Model</b>	3010FDV	4510FDV	6010FDV
<b>Max. Seal Length</b>	300mm	450mm	600mm
<b>Max. Seal Thickness</b>	2 x 0.5mm	2 x 0.5mm	2 x 0.5mm
<b>Seal Width</b>	10mm	10mm	10mm
<b>Watts</b>	2100W	2500W	2900W
<b>Weight</b>	29KG	31KG	33KG

<b>Model</b>	200CFV	300CFV
<b>Max. Seal Length</b>	200mm	300mm
<b>Max. Seal Thickness</b>	2 x 0.25mm	2 x 0.25mm
<b>Seal Width</b>	15mm	15mm
<b>Watts</b>	350W	450W
<b>Weight</b>	27KG	29KG

<b>Model</b>	400CFV	600CFV
<b>Max. Seal Length</b>	400mm	600mm
<b>Max. Seal Thickness</b>	2 x 0.25mm	2 x 0.25mm
<b>Seal Width</b>	15mm	10mm
<b>Watts</b>	520W	640W
<b>Weight</b>	31KG	36KG

# HEAVY-DUTY HAND SEALERS

## 3010FH MANUAL BI-ACTIVE IMPULSE SEALERS

HAND OPERATED. TABLET IMPULSE. DOUBLE SEAL. EXCELLENT FOR PLASTIC LINED FOIL AND GASSET BAGS. SEALING WIDTH 5mm/10mm IS AVAILABLE



CE

## 200CFH MANUAL CONSTANT HEAT SEALERS

HAND OPERATED CONSTANT HEAT SEALER EXCELLENT FOR SEALING ALUMINUM FOIL COATED BAGS AND GUSSET BAGS.



CE

## PORTABLE I-BAR SEALER

TO SEAL LARGE OBJECTS EASIER, SPECIAL FOR GIFT BASKETS AND MOST PACKAGING PRODUCTS

400HP



CE

600WP



Model	205FH	305FH
Max. Seal Length	200mm	300mm
Max. Seal Thickness	2 X 0.5mm	2 X 0.5mm
Seal Width	5mm	5mm
Watts	1200 W	1500 W
Weight	12KG	13KG

Model	200CFH	300CFH
Max. Seal Length	200mm	300mm
Max. Seal Thickness	2 X 0.25mm	2 X 0.25mm
Seal Width	10/15mm	10/15mm
Watts	250 W	350 W
Weight	9KG	10KG

Model	400HP	600HP	800HP	450HPW	600HPW	400WP	600WP	800WP
Max. Seal Length	400mm	600mm	800mm	450mm	600mm	400mm	600mm	800mm
Max. Seal Thickness	2x0.15mm	2x0.15mm	2x0.15mm	2x0.15mm	2x0.15mm	2x0.15mm	2x0.15mm	2x0.15mm
Seal Width	1mm	1mm	1mm	5mm	5mm	1mm	1mm	1mm
Watts	600W	800W	1000W	600W	1000W	350W	450W	750W
Weight	16KG	18KG	20KG	16KG	20KG	13KG	15KG	17KG

# HAND HELD SEALERS

## 105CH CLAM SHELL HAND SEALER

TO SPOT SEAL EPS.PSP.PVC AND FOOD BOX.



CE

## 405US ULTRASONIC CLAM SHELL SEALER

TO SPOT SEAL OPS.PSP.PVC, AND EPS BOXES. QUICK! SAFE! NEAT! SIMPLE!



CE

## 801/802/803HW CONSTANT HEAT ROLLER SEALERS

VERSATILE SEALER CAN MAKE A ROUND OVAL OR SQUARE TEXTURED. TEMPERATURE ADJUSTABLE. SEALING WIDTH AVAILABLE 1mm(SEAL & CUT), 5mm, 9mm



200HS

## 200HS / 300DH HAND HELD CRIMPER SEALER

EXCELLENT FOR CELLOPHANE AND FOIL BAGS TEMPERATURE ADJUSTABLE



CE



CE

Model	105CH
Sealing Length	10mm
Seal Width	5mm
Temperature	Lo 180°C Hi 210°C
Watts	14.5 W
Weight	1.5KG

Model	305US	405US
Sealing Length	4mm	4mm
Seal Width	3mm	3mm
Output W	20W	20W
Watts	30W(40VA)	30W(40VA)
Weight	3KG	3KG

Model	801HW	802HW	803HW
Material Thickness	2 X 0.15mm	2 X 0.15mm	2 X 0.15mm
Seal Width	1mm	5mm	9mm
Watts	70W	70W	70W
Weight	0.7KG	0.9KG	1.1KG

Model	150HS	200HS	150DH	300DH	400DH
Max. Sealing Length	150mm(6")	200mm(8")	150mm(6")	300mm(12")	400mm(16")
Max. Seal Width	2mm	2mm	15mm	12mm	12mm
Watts	25W	100W	50 W	350W	420W
Weight	1KG	0.5KG	1.5KG	3.0KG	4.0KG

# CONTINUOUS BAND SEALERS

## 881BS HORIZONTAL BAND SEALER

STAINLESS MACHINE BODY. COVER MAKES A CLEAN AND SECURE SEAL. 665HS AUTO IMPRINTER IS AVAILABLE


665HS AUTO IMPRINTER



CE

## 872BS VERTICAL BAND SEALER

STANDING SEALING IDEAL FOR POWDERS, LIQUIDS, GRAINS PACKAGING ADJUSTABLE FLAME, HEAT AND SPEED, WITH EMERGENCY SWITCH.



CE

## 883BS HORIZONTAL BAND SEALER

WITH STAND ADJUSTABLE FLAME, HEAT AND SPEED, WITH EMERGENCY SWITCH



CE

Model	Seal Width	Max. Depth Seal	Motor	Temp.	Watts	Speed	Weight
881BS	10mm	40mm	1/12HP	0~300°C	550W	0~12m/min	35KG
882BS	10mm	40mm	1/12HP	0~300°C	550W	0~12m/min	40KG
883BS	10mm	40mm	1/12HP	0~300°C	550W	0~12m/min	45KG
871BS	10mm	20mm	1/12HP	0~300°C	550W	0~10m/min	32KG
872BS	10mm	20mm	1/12HP	0~300°C	550W	0~10m/min	35KG

# AUTOMATIC SEALER(TABLETOP)

**450AI AUTOMATIC SINGLE SEALER**  
 IMPRINTER & COUNTER ARE AVAILABLE.  
 INCLUDES AN ELECTRIC FOOT PEDAL FOR  
 MANUAL OPERATION.  
 SEALING WIDTH 2mm/5mm/10mm AVAILABLE

**305FDA BI-ACTIVE IMPULSE SEALER**  
 HEAVY-DUTY;SINGLE OR BI-ACTIVE;  
 AUTOMATIC OR MANUAL OPTION.  
 IMPRINTER IS AVAILABLE.  
 SEALING WIDTH 5mm/10mm AVAILABLE

**450FUA UPPER JAW IMPULSE**  
 REVERSING THE SEALING ELEMENT  
 ON THE UPPER JAW TO PROTECT  
 THE ELEMENT FROM MOISTURE AND  
 CONTAMINATION. IDEAL FOR  
 LIQUIDS PACKAGING.  
 SEALING WIDTH 2mm/5mm/10mm AVAILABLE


**300CFA AUTOMATIC CONSTANT  
 HEAT SEALER**  
 EXCELLENT FOR SEALING  
 ALUMINUM FOIL COATED  
 BAGS AND GUSSET BAGS  
 EQUIPPED WITH MASK  
 PREVENTING SCALD.




CE



CE



CE

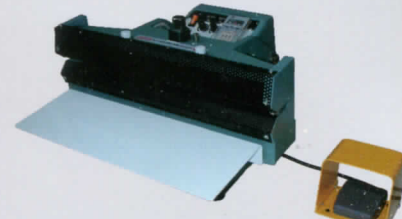


CE

Model	350AI	450 AI	600 AI	800AI	1000AI	305 FDA	455 FDA	605 FDA	300FUA	450FUA	600FUA	200CFA	300CFA	400CFA	600CFA
Sealing Length	350mm	450mm	600mm	800mm	1000mm	300mm	450mm	600mm	300mm	450mm	600mm	200mm	300mm	400mm	600mm
Max. Seal Thickness	2 X 0.15mm	2 X 0.15mm	2 X 0.15mm	2 X 0.15mm	2 X 0.15mm	2 X 0.5mm	2 X 0.5mm	2 X 0.5mm	2 X 0.15mm	2 X 0.15mm	2 X 0.15mm	2 X 0.25mm	2 X 0.25mm	2 X 0.25mm	2 X 0.25mm
Seal Width	2.5mm	2.5mm	2.5mm	2.5mm	2.5mm	5 mm	5 mm	5 mm	2.5mm	2.5mm	2.5mm	15mm	15mm	15mm	15mm
Watts	600 W	700 W	900 W	1200W	1500W	1600 W	1900 W	2300 W	550 W	700 W	900 W	350 W	450 W	520 W	640W
Weight	20KG	21KG	22KG	27KG	29KG	21KG	23KG	25KG	20KG	21KG	22KG	15KG	17KG	19KG	21KG

## AUTOMATIC SEALER WITH TEMP.CONTROL



**355AS IMPULSE AUTO SEALER  
 WITH TEMP. CONTROL**  
 INCLUDES AN ELECTRIC FOOT PEDAL FOR  
 MANUAL OPERATION. HEAT TEMP. 80~250° C  
 SEALING WIDTH 2mm/5mm/10mm AVAILABLE



CE

**805AS IMPULSE AUTO SEALER  
 WITH TEMP. CONTROL**



**305FSA BI-ACTIVE IMPULSE AUTO SEALER  
 WITH TEMP. CONTROL**  
 HEAVY-DUTY;SINGLE OR BI-ACTIVE;AUTOMATIC OR MANUAL OPTION.  
 IMPRINTER IS AVAILABLE. HEAT TEMP. 80~250° C  
 SEALING WIDTH 5mm/10mm AVAILABLE



CE

Model	355AS	455AS	605AS	805AS	1005AS	355ASD	455ASD	605ASD	305FSA	455FSA	605FSA	805FSA
Sealing Length	350mm	450mm	600mm	800mm	800mm	350mm	450mm	600mm	300mm	450mm	600mm	800mm
Max. Seal Thickness	2 X 0.15mm	2 X 0.15mm	2 X 0.15mm	2 X 0.15mm	2 X 0.15mm	2X0.25mm	2X0.25mm	2X0.25mm	2 X 0.5mm	2 X 0.5mm	2 X 0.5mm	2 X 0.5mm
Seal Width	5mm	5mm	5mm	5mm	5mm	5mm	5mm	5mm	5mm	5mm	5mm	5mm
Watts	1000 W	1200 W	1500 W	1900 W	2500 W	1600 W	1900 W	2300 W	1600 W	1900 W	2300 W	2900 W
Weight	21 KG	22 KG	23 KG	25 KG	31 KG	21 KG	23 KG	25 KG	24 KG	25 KG	26 KG	27 KG

## FOOD PACKAGING MACHINE

**500WD FOOD WRAPPER**  
 WRAPPING FILM UP TO 500mm  
 TEFLON CUTTING WIRE REPLACEMENT EASILY  
 WITH GERMANY EGO THERMO CONTROLLER



CE

**400BO BAG OPENER AND FILLER**  
 AIR FLOWS BAG OPEN FOR RAPID PACKAGING FILLING.  
 STAINLESS STEEL BODY EASY CLEANING.  
 OPERATES WITH WICKET BAGS.



CE

**250SI SHOP SEALER**  
 HAND-PRESS SEALER.  
 STAINLESS STEEL BODY.  
 CAN BE MOUNTED ON A WALL FOR  
 VERTICAL SEALING.



CE

Model	500WD	Model	400BO	Model	250SI	300SI
Heated Teflon Plate	385 x125mm	Airflow	20 CFM	Sealing Length	250mm	300mm
Heater Power	210W	Max. Bag Width	400mm	Max. Seal Thickness	2 X 0.15mm	2 X 0.15mm
Cutting Wire Power	30W	Dimension	400 x 770 x 230mm	Seal Width	2.5/5mm	2.5/5mm
Dimension	610 x 560 x 157mm	Watts	50 W	Watts	300/700 W	300/700 W
Weight	9.5KG	Weight	12.5KG	Weight	8KG	9KG

# FOOT SEALER WITH CUTTER

**450FDC SEAL AND CUT IMPULSE SEALER**  
DESIGNED TO CUT AND SEAL IN ONE OPERATION

**450FC FOOT SEALER WITH CUTTER**  
AVAILABLE FOR EVERY SEAL MASTER WITH TUBE AND CUTTER SYSTEM.

**450FS STAINLESS TYPE FOOT SEALER**  
AVAILABLE FOR EVERY SEAL MASTER WITH TUBE.



CE



CE




CE

Model	300FDC	450FDC	600FDC	450FC	455FC	600FC	605FC	450FS	455FS	600FS	605FS
Max. Seal Length	300mm	450mm	600mm	450mm	450mm	600mm	600mm	450mm	450mm	600mm	600mm
Max. Seal Thickness	2x0.15mm	2x0.15mm	2x0.15mm	2x0.15mm	2x0.15mm	2x0.15mm	2x0.15mm	2x0.15mm	2x0.15mm	2x0.15mm	2x0.15mm
Seal Width	2.5mm	2.5mm	2.5mm	2.5mm	5mm	2.5mm	2.5mm	5mm	2.5mm	5mm	5mm
Watts	1500W	1800W	2200W	600W	1100W	800W	1400W	600W	1100W	800W	1400W
Weight	23KG	25KG	27KG	28KG	30KG	32KG	34KG	30KG	32KG	34KG	36KG


## AUTO SEALER (MOTOR SEALER TYPE)

**450FCE AUTO IMPULSE SEALER WITH CUTTER**  
AVAILABLE FOR EVERY SEAL MASTER WITH TUBE AND CUTTER SYSTEM.  
SUS 304 COVER AVAILABLE

**400CFE AUTO CONSTANT HEAT SEALER**  
AVAILABLE FOR EVERY SEAL MASTER

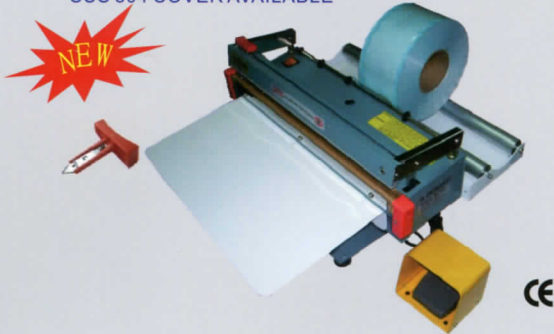

CE

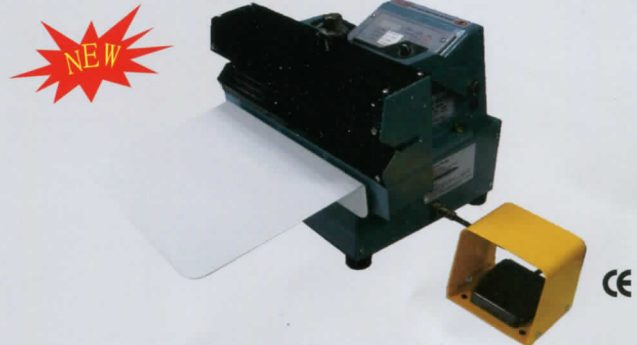

CE

Model	450FCE	455FCE	600FCE	605FCE
Max. Seal Length	450mm	450mm	600mm	600mm
Max. Seal Thickness	2x0.15mm	2x0.15mm	2x0.15mm	2x0.15mm
Seal Width	2.5mm	5mm	2.5mm	5mm
Watts	700W	1200W	900W	1500W
Weight	30KG	32KG	34KG	36KG

Model	200CFE	300CFE	400CFE
Max. Seal Length	200mm	300mm	400mm
Max. Seal Thickness	2X2.5mm	2X2.5mm	2X2.5mm
Seal Width	15mm	15mm	15mm
Watts	350W	450W	520W
Weight	22KG	24KG	26KG

## PNEUMATIC AUTO SEALERS

**300CFG PNEUMATIC CONSTANT HEAT SEALER**  
SEALING PRESSURE IS INCREASED AND CONSISTENT.  
SAVING TIME, ENERGY AND NO NOISE.  
REQUIRES 0.5HP COMPRESSOR.

**305FDG PNEUMATIC IMPULSE SEALER IS AVAILABLE.**  
SEALING PRESSURE IS INCREASED AND CONSISTENT  
SAVING TIME, ENERGY AND NO NOISE.  
REQUIRES 0.5HP COMPRESSOR.

**PNEUMATIC AUTO SEALERS WITH ADJUSTABLE ANGLE TYPE**



CFG


CE



FDG



FTG




CAG

CE

# HOT STAMP IMPRINTERS FOR SEALER

## VARIOUS IMPRINTER MOUNTED ON THE SEALING MACHINE


660HS INSIDE DEVICE FOR IMPULSE SEALER 2 LINES

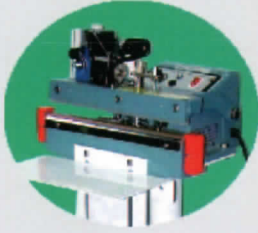

661HS FOR CONSTANT HEAT SEALER 2 LINES



662HS OUTSIDE DEVICE FOR AUTOMATIC SEALER 2 LINES



668HS FOR ALL TYPE OF SEALERS 3 LINES




# HOT STAMP IMPRINTERS

664HS PHOTO AUTO IMPRINTER  
AUTOMATIC PRINT WITH SENSOR  
FOOT SWITCH FOR MANUAL OPERATION.  
EFFICIENCY AND CLEARLY.  
3 LINES.



666HS MANUAL IMPRINTER  
DESKTOP ECONOMICAL HAND-PRESS  
IMPRINTER 2 LINES/3 LINES.



667HS  
PADEL IMPRINTER



# Accessories & spare parts

WORKING TABLE



FILM ROLLER



HEAVY-DUTY WORKING TABLE



HEATING ELEMENT



SHRINK FILM



PARTS FOR PRINTERS



AGENT

CONPAC  
108 Belair Road  
Hawthorne 3002

Ph: (08) 8272 8346 Fax: (08) 8373 4001